



# Chemical Consultants INCORPORATED

**CG-2**

**Press Wash**

### GENERAL DESCRIPTION

**CG-2 is best suited for clean-up of plastisol ink. Use this product as a screen opener, as a screen wash when saving the emulsion, and as a press wipe during continuous printing. This product is also an excellent cleaner for the removal of pallet or belt printers' adhesive.**

**This product can be used in a wide variety of innovative cleaning processes ranging from re-circulation machines, dip tanks, or precision immersion cleaning processes. It may also be applied manually by a brush or a hand held sprayer. CG-2 is fast drying and leaves no film or oil residue so that the clean surface is in excellent condition for tape adhesion.**

### ADVANTAGES

- High solvency.
- Low odor.
- Mesh safe.
- Emulsion safe.
- Low vapor pressure.
- High load capacity to reduce usage.
- Multiple Applications.


### APPLICATION

Always card excessive ink from screen. Use one of the following applications.


#### **Quick Tip:**

**To cut down on the number of rags it takes to clean a screen, use a non absorbent scrub pad to liquify the ink and a squeegee to pull all the ink to one end of the screen and wipe up with one or two rags.**


### **PRESS WASH AND SCREEN OPENER**

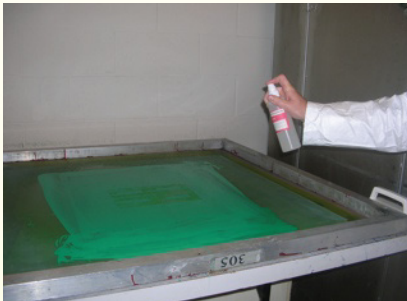

Step 1 . Spray CG-2 on the squeegee side of screen.

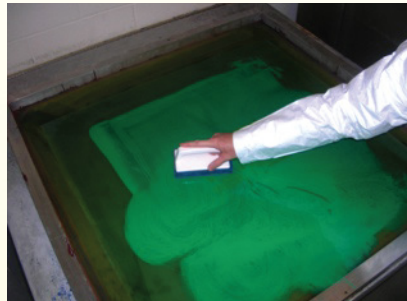

Step 2 . Scrub ink with a non-absorbent pad until liquified.

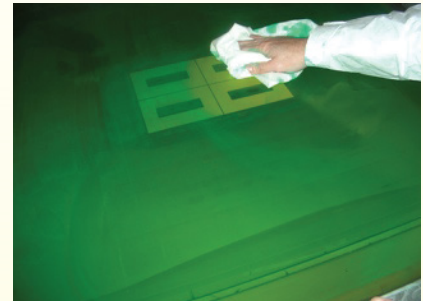

Step 3 . Use rags or towels to wipe up ink residue. Re-apply to clean up ink residue in image area.

### **RECIRCULATING WASH**

*Card excessive ink from the screen. CG-2 can be continuously recirculated until product becomes too heavily soiled with solids. Used product may be filtered and reused.*



**426D SS**

[Click here for more details.](#)



**SQ-1000**

[Click here for more details.](#)

#### **Packaging:**

**1 gallon**

**5 gallon pail**

**30 gallon drum**

**55 gallon drum**